



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification :

Not classified

A2

(11) International Publication Number:

WO 00/41536

(43) International Publication Date:

20 July 2000 (20.07.00)

(21) International Application Number: PCT/US00/00704

(22) International Filing Date: 12 January 2000 (12.01.00)

(30) Priority Data:

60/115,660

13 January 1999 (13.01.99)

US

(71) Applicant (for all designated States except US): INTEST IP CORP. [US/US]; 300 Delaware Avenue, Wilmington, DE 19801 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): HOLT, Alyn, R. [US/US]; 10 Hessian Way, Cherry Hill, NJ 08003 (US). WEST, Christopher, L. [US/US]; 17 Goose Pond Road, Tabernacle, NJ 08088 (US). MOORE, Brian, R. [GB/GB]; Oak Cottage, Callington, Cornwall PL17 8AL (GB). POWELL, Richard, C., Jr. [US/US]; 147 Kendall Blvd., Oaklyn, NJ 08107 (US). WEILERSTEIN, I., Marvin [US/US]; 1063 Kingsley Road, Jenkintown, PA 19046 (US).


(74) Agents: ASHERY, Lawrence, E. et al.; Ratner &amp; Prestia, 301 One Westlakes (Berwyn), P.O. Box 980, Valley Forge, PA 19482-0980 (US).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

Without international search report and to be republished upon receipt of that report.

(54) Title: TEST HEAD MANIPULATOR

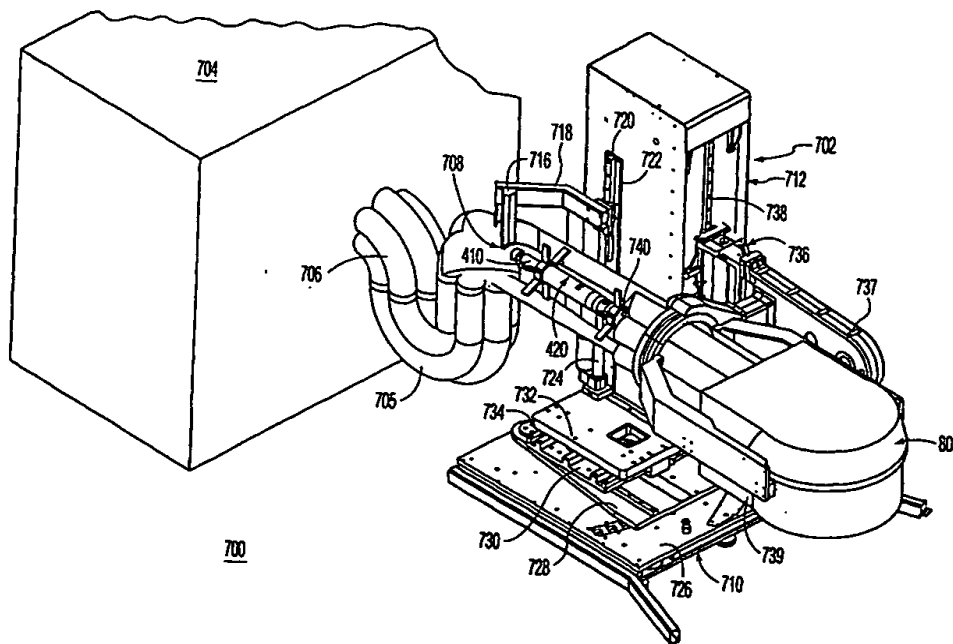

(57) Abstract

A system is useful for positioning a load, such as a test head. The system includes an arm which supports the load and which moves along a first vertical axis. The system also includes a rotation unit for rotating the first vertical axis about a second vertical axis spaced apart from the first vertical axis.